

Q USW-WAN

- Cloud Gateways
- Switching
- WiFi
- Camera Security
- Door Access
- Integrations
- Advanced Hosting
- Accessories


WAN > WAN Switch

Datasheet

In The Box

Marketing Images

Installation Guide

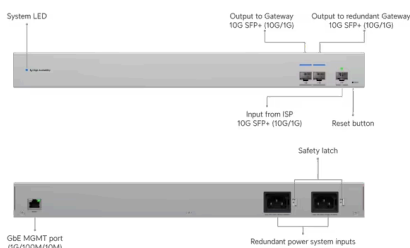

^ Overview

Dimensions 442.4 x 120 x 43.7 mm
(17.4 x 4.72 x 1.7")

Port Layout

1 GbE RJ45	1 (1G/100M/10M)
10G SFP+	3 (10G/1G)

Redundancy (2) AC inputs

Form Factor Rack mount (1U)

^ Performance

Switching Capacity 20 Gbps

Total Non-Blocking Throughput 10 Gbps

Forwarding Rate 15 Mpps

^ Hardware

Max. Power Consumption 13W

Power Method (2) Universal input, 100—240V AC, 50/60 Hz

Power Input Method AC input

Power Supply (2) AC/DC, internal, 36W

Supported Voltage Range 100—240V AC

Management Ethernet

Weight Without mounting brackets: 2.2 kg (4.85 lb)
With mounting brackets: 2.3 kg (5.1 lb)

Enclosure Material SGCC steel

Mount Material SGCC steel

ESD/EMP Protection Air: ± 16kV, contact: ± 22kV

Ambient Operating Temperature -5 to 40° C (23 to 104° F)

Ambient Operating Humidity 10 to 90% noncondensing

LEDs

Ethernet ✓

SFP+ ✓

System ✓

Certifications CE, FCC, IC

NDAA Compliant ✓

^ **Software**

Application Requirements

UniFi Network Version 9.1.119 and later

Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.