


Search UniFi products

- UniFi Cloud Gateways
- Switching
- WiFi
- Camera Security
- Door Access
- CloudKeys & Gateways
- Power Tech
- Integrations
- Accessories

Managed VoIP > G3 Touch Wall

- Datasheet**
- In The Box
- Marketing Images
- Installation Guide

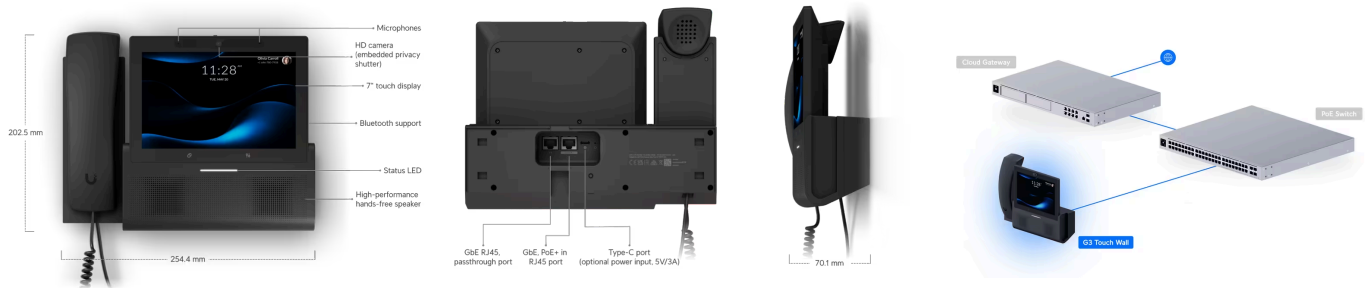

### Mechanical

<b>Dimensions</b>	254.4 x 202.5 x 70.1 mm (10 x 8 x 2.8")
<b>Weight</b>	1.1 kg (2.5 lb)
<b>Enclosure material</b>	Polycarbonate, aluminum alloy (base)
<b>Mounting</b>	Wall
<b>Colour</b>	Black

### Display

<b>Display size</b>	178 mm (7") diagonal
<b>Resolution</b>	1280 x 800 HD
<b>Screen technology</b>	Multi-touch
<b>Screen surface treatments</b>	Anti-glare coating

### Audio

<b>Handset dynamic receiver</b>	32 ohm Sensitivity: 121 dB/10mW at BK4195
<b>Handset microphone</b>	Omnidirectional electret microphone SNR 70 dB Sensitivity -38 ±3 dB
<b>Hands-free speaker</b>	Stereo, 4 ohm Nominal power: 3W Max. power: 5W
<b>Hands-free microphone</b>	Dual omnidirectional MEMS microphones

---

## Hardware


Processor	Octa-core ARM® Cortex®-A53
Memory	Storage: 32 GB RAM: 2 GB
Power method	USB type-C 5V DC, 3A PoE+ 44—57V DC, 25.5W
Connectivity	(2) GbE RJ45 ports 802.11 a/b/g/n/ac WiFi Bluetooth® 4.2 (General use) Bluetooth® 5.2 (Ubiquiti G3 Wireless Handset only) NFC
Camera	2592 x 1944, 5MP (Embedded privacy shutter)
LED	R/G/B/W
Ambient operating temperature	0 to 40° C (32 to 104° F)
Ambient operating humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE

---

## Software

UniFi OS application	UniFi Talk Talk Relay
----------------------	--------------------------

### Stay in Touch



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.